


Specifications


Model No: DL6750140SP

Basic Information	Nominal Capacity	4100mAh
	Nominal Voltage	3.7V
	Impedance	$\leq 6m\Omega$
	Weight(Approx.)	85g
	Dimensions	Thickness = $6.7 \pm 0.2mm$ Width = $50 \pm 0.5mm$ Length = $140 \pm 2.0mm$
Charge Condition	Nominal Charge Current	4100mA(1C)
	Voltage	4.2V
	Cut-off Current	205mA(0.05C)
	Ending Time	1.5h
	Max.Charge Current	20.5A(5C)
	Max.Recommended Charge Current	16.4A(4C)
Discharge Condition	Nominal Discharge Current	4100mA(1C)
	Cut-off Voltage	3.0V
	Max.Discharge Current	Continuous 82A(20C) Burst 164A(40C)
Temperature Condition	Charge	0~45°C
	Discharge	-20~60°C
	Storage	-20~45°C
Cycle Life	>=100 Cycles	At 20°C discharge,23°C
Self-discharge	Residual Capacity>92%	At 25°C \pm 2°C,30 days


Dimensions(mm)

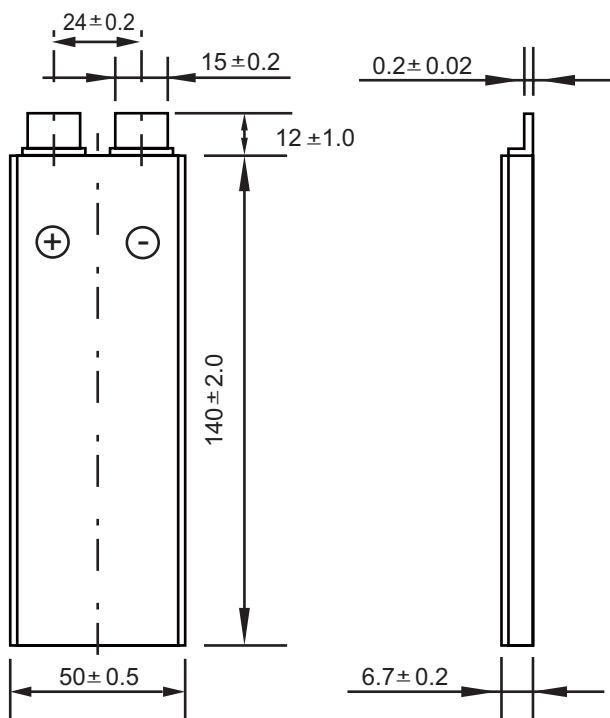


charge characteristics

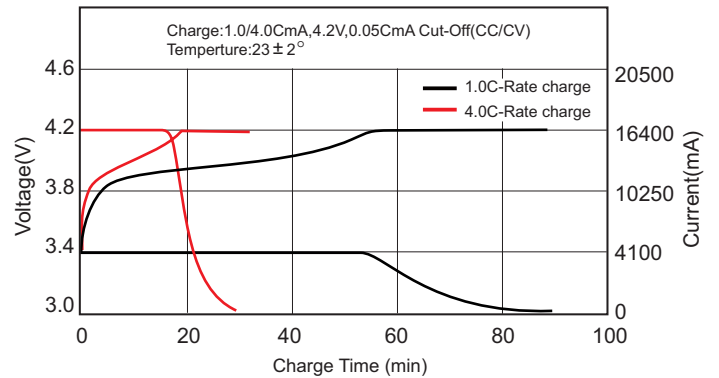

Discharge Rate Characteristics

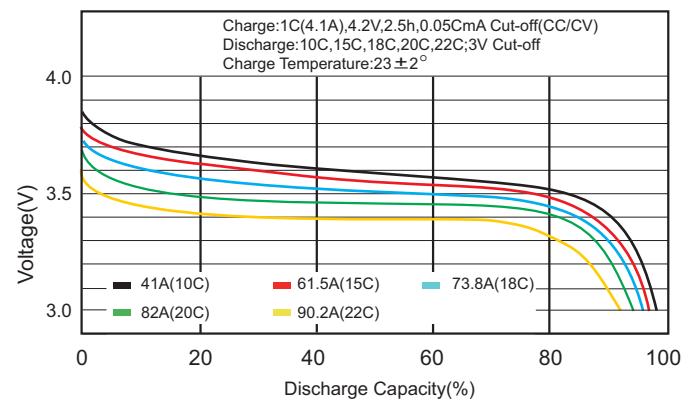

Discharge Temperature Characteristics

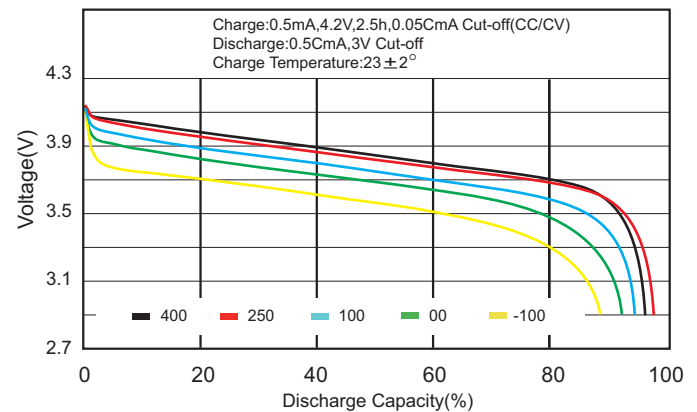

Cycle Life Characteristics

